


SMD SPRING COIL

1.DIMENSION

UNIT:mm

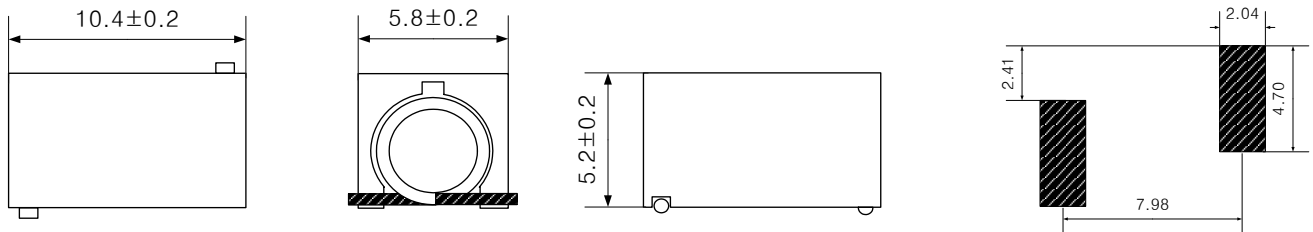

2.APPROVAL SHEET

NO.	MODEL	A.W	W.S	Φ ID	TURNS	W.D	W.W	COLOR
1	ME1 0.45-3.3-16TR	PEAg	0.45	3.3	16T	R	CLOSED	N
2	ME1 0.55-3.3-13TR	PEAg	0.55	3.3	13T	R	CLOSED	N
3	ME1 0.55-3.3-14TR	PEAg	0.55	3.3	14T	R	CLOSED	N
4	ME1-0.55-3.3-15TR	PEAg	0.55	3.3	15T	R	CLOSED	N
5	ME1-0.60-3.3-12TR	PEAg	0.60	3.3	12T	R	CLOSED	N

2-1)A Simplified Character

- *A.W : A kind of Wire
- *W.S : Wire Size
- *I.D : Internal Diameter Dia of Hole ± 0.1
- *W.D : Winding Direction / L=Left, R=Right
- *W.W : Winding Width
- *PEW Ag : POLYURETHANE ENAMEL WIRE Ag

3.ELECTRIC CHARACTERISTICS

NO.	MODEL	INDUCTANCE(nH)	TOLERANCE(%)
1	ME1 0.45-3.3-16TR	355	$\pm 30\%$
2	ME1 0.55-3.3-13TR	245	$\pm 30\%$
3	ME1 0.55-3.3-14TR	265	$\pm 30\%$
4	ME1-0.55-3.3-15TR	280	$\pm 30\%$
5	ME1-0.60-3.3-12TR	205	$\pm 30\%$