


IFT & RF COIL

SMD TYPE

SMD01

DIMENSIONS & SPECIFICATION

UNIT : mm

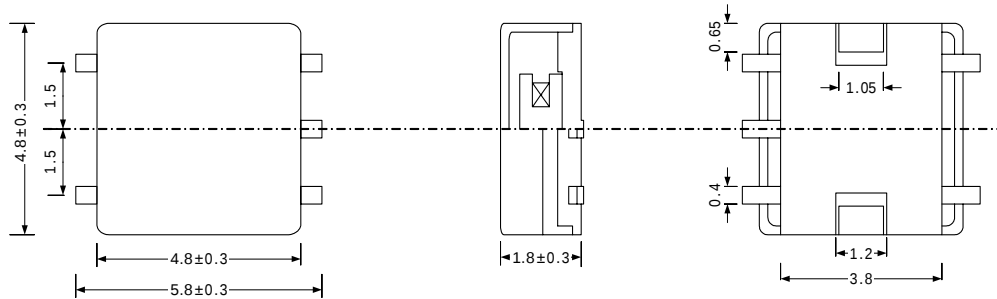

Ordering code	Inductance range (uH) min.	Qu min.	Test frequency
LS01-001A	1.0 ± 3%	10	7.96 MHz
LS01-002A	1.2 ± 3%	10	7.96 MHz
LS01-003A	1.5 ± 3%	10	7.96 MHz
LS01-004A	1.8 ± 3%	10	7.96 MHz
LS01-005A	2.2 ± 3%	10	7.96 MHz
LS01-006A	2.7 ± 3%	10	7.96 MHz
LS01-007A	3.3 ± 3%	10	7.96 MHz
LS01-008A	3.9 ± 3%	10	7.96 MHz
LS01-009A	4.7 ± 4%	10	7.96 MHz
LS01-010A	5.6 ± 4%	10	7.96 MHz
LS01-011A	6.8 ± 4%	10	7.96 MHz
LS01-012A	8.2 ± 4%	10	7.96 MHz
LS01-013A	10.0 ± 5%	10	2.52 MHz
LS01-014A	12.0 ± 5%	10	2.52 MHz
LS01-015A	15.0 ± 5%	10	2.52 MHz
LS01-016A	18.0 ± 5%	10	2.52 MHz
LS01-017A	22.0 ± 5%	10	2.52 MHz
LS01-018A	27.0 ± 5%	10	2.52 MHz
LS01-019A	33.0 ± 5%	10	2.52 MHz
LS01-020A	39.0 ± 5%	10	2.52 MHz
LS01-021A	47.0 ± 5%	10	2.52 MHz
LS01-022A	56.0 ± 5%	10	2.52 MHz
LS01-023A	68.0 ± 5%	10	2.52 MHz
LS01-024A	82.0 ± 5%	10	2.52 MHz
LS01-025A	100.0 ± 5%	10	2.52 MHz