


IFT & RF COIL

SMD TYPE

SMD53

DIMENSIONS & SPECIFICATION

UNIT : mm

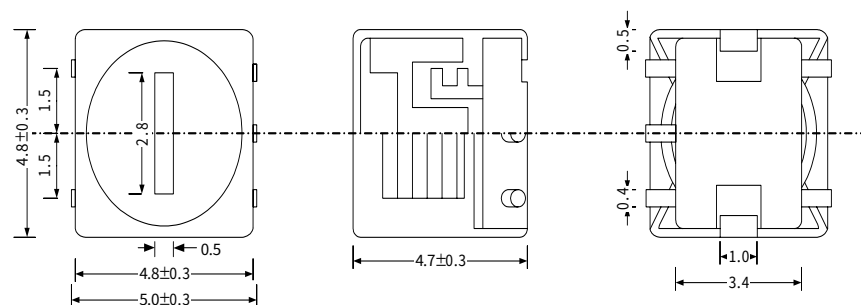

Ordering code	Inductance range (uH) min.	Qu min.	Test frequency
LS53-001A	0.10±5%	20	25.2 MHz
LS53-002A	0.12±5%	20	25.2 MHz
LS53-003A	0.15±5%	20	25.2 MHz
LS53-004A	0.18±6%	20	25.2 MHz
LS53-005A	0.22±6%	20	25.2 MHz
LS53-006A	0.27±6%	20	25.2 MHz
LS53-007A	0.33±6%	20	25.2 MHz
LS53-008A	0.39±6%	20	25.2 MHz
LS53-009A	0.47±6%	20	25.2 MHz
LS53-010A	0.56±6%	20	25.2 MHz
LS53-011A	0.68±6%	20	25.2 MHz
LS53-012A	0.82±6%	20	25.2 MHz
LS53-013A	1.00±6%	20	7.96 MHz
LS53-014A	1.20±6%	20	7.96 MHz
LS53-015A	1.50±6%	20	7.96 MHz
LS53-016A	1.80±6%	20	7.96 MHz