


IFT & RF COIL

SMD TYPE

SMD58

DIMENSIONS & SPECIFICATION

UNIT : mm

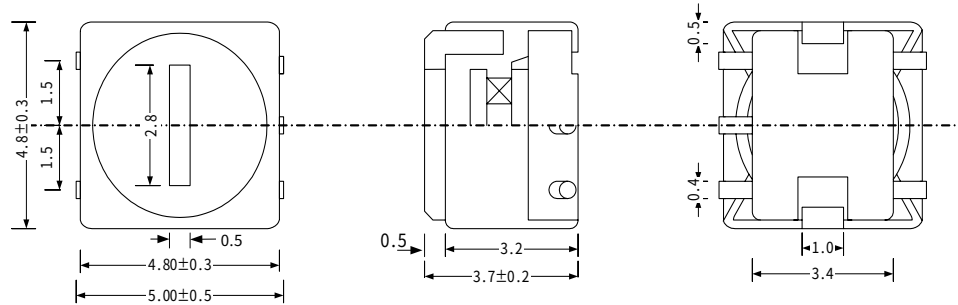

Ordering code	Inductance range (uH) min.	Qu min.	Test frequency
LS58-001A	10.0±5%	20	2.52 MHz
LS58-002A	11.0±5%	20	2.52 MHz
LS58-003A	12.0±5%	20	2.52 MHz
LS58-004A	13.0±5%	20	2.52 MHz
LS58-005A	15.0±5%	20	2.52 MHz
LS58-006A	16.0±5%	20	2.52 MHz
LS58-007A	18.0±5%	20	2.52 MHz
LS58-008A	20.0±5%	20	2.52 MHz
LS58-009A	22.0±5%	20	2.52 MHz
LS58-010A	24.0±5%	20	2.52 MHz
LS58-011A	27.0±5%	20	2.52 MHz
LS58-012A	30.0±5%	20	2.52 MHz
LS58-013A	33.0±5%	20	2.52 MHz
LS58-014A	36.0±5%	20	2.52 MHz
LS58-015A	39.0±5%	20	2.52 MHz
LS58-016A	43.0±5%	20	2.52 MHz
LS58-017A	47.0±5%	20	2.52 MHz
LS58-018A	51.0±5%	20	2.52 MHz
LS58-019A	56.0±5%	20	2.52 MHz
LS58-020A	62.0±5%	20	2.52 MHz
LS58-021A	68.0±5%	20	2.52 MHz
LS58-022A	75.0±5%	20	2.52 MHz
LS58-023A	82.0±5%	20	2.52 MHz
LS58-024A	91.0±5%	20	2.52 MHz
LS58-025A	100.0±5%	20	2.52 MHz
LS58-026A	110.0±5%	20	796 kHz
LS58-027A	120.0±5%	20	796 kHz
LS58-028A	130.0±5%	20	796 kHz
LS58-029A	150.0±5%	20	796 kHz