


# IFT & RF COIL

SMD TYPE

SMD59

## DIMENSIONS & SPECIFICATION

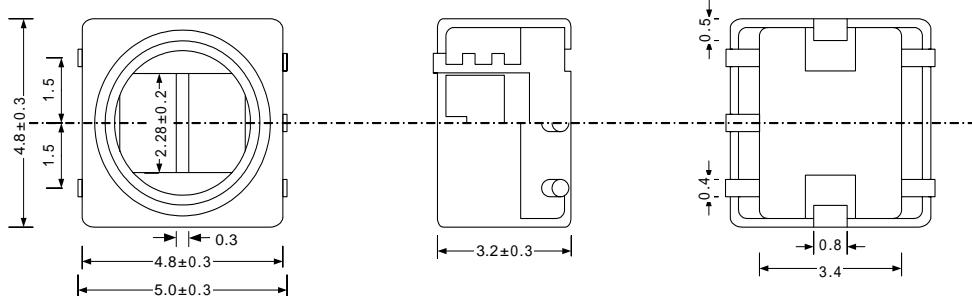

UNIT : mm

Ordering code	Inductance range (uH) min.	Qu min.	Test frequency
LS59-001A	0.10 ± 5%	10	25.2 MHz
LS59-002A	0.12 ± 5%	10	25.2 MHz
LS59-003A	0.15 ± 5%	10	25.2 MHz
LS59-004A	0.18 ± 6%	10	25.2 MHz
LS59-005A	0.22 ± 6%	10	25.2 MHz
LS59-006A	0.27 ± 6%	10	25.2 MHz
LS59-007A	0.33 ± 6%	10	25.2 MHz
LS59-008A	0.39 ± 6%	10	25.2 MHz
LS59-009A	0.47 ± 6%	10	25.2 MHz
LS59-010A	0.56 ± 6%	10	25.2 MHz
LS59-011A	0.68 ± 6%	10	25.2 MHz