


IFT & RF COIL

SMD TYPE

SMD59A

DIMENSIONS & SPECIFICATION

UNIT : mm

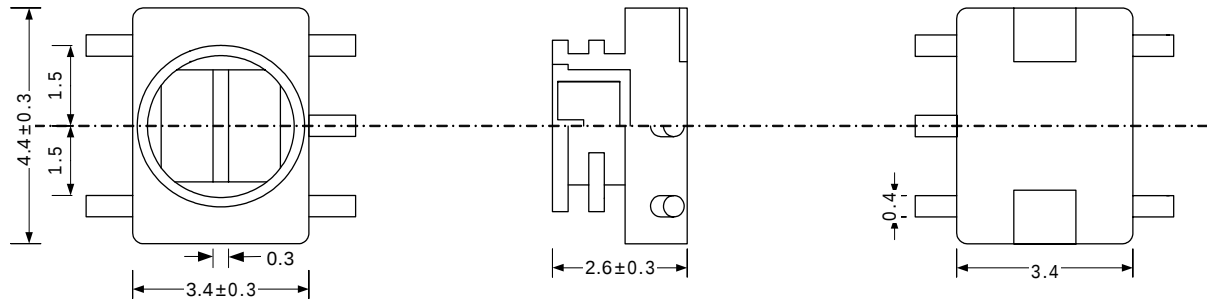

Ordering code	Inductance range (uH) min.	Qu min.	Test frequency
LS59A-001A	0.10 ± 5%	10	25.2 MHz
LS59A-002A	0.12 ± 5%	10	25.2 MHz
LS59A-003A	0.15 ± 5%	10	25.2 MHz
LS59A-004A	0.18 ± 6%	10	25.2 MHz
LS59A-005A	0.22 ± 6%	10	25.2 MHz
LS59A-006A	0.27 ± 6%	10	25.2 MHz
LS59A-007A	0.33 ± 6%	10	25.2 MHz
LS59A-008A	0.39 ± 6%	10	25.2 MHz
LS59A-009A	0.47 ± 6%	10	25.2 MHz
LS59A-010A	0.56 ± 6%	10	25.2 MHz
LS59A-011A	0.68 ± 6%	10	25.2 MHz
LS59A-012A	0.82 ± 6%	10	25.2 MHz