


BALUN

SMD TYPE

SB02

DIMENSIONS & CHARACTERISTIC

UNIT : mm

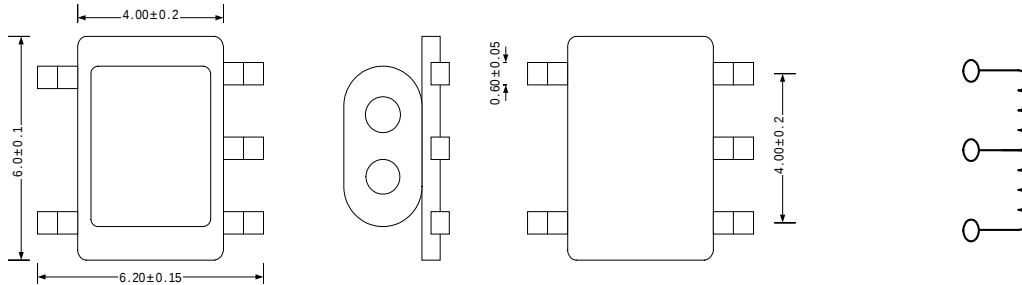


Ordering code	Number of Turns perWinding	Operating Frequency Range (MHz)	Insertion Loss(dB)
SB02-007A	2	1300~1700	IN to OUT-1,2 4.5dB max
SB02-008A	3	800~1000	IN to OUT-1,2 (ISOLATION) 15dB min

BALUN

DIP TYPE

DB7C

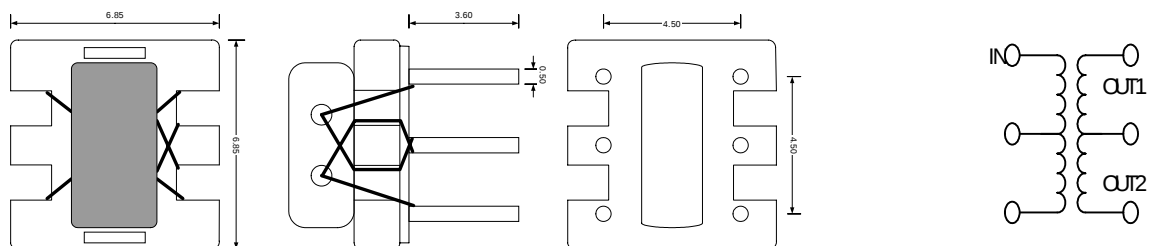

Ordering code	Number of Turns perWinding	Operating Frequency Range (MHz)	Insertion Loss(dB)
DB7C-001A		20~600	IN to 1,2 4.5dB max OUT-1 to OUT-2 (ISOLATION) 10dB min